


It is possible to burnish inside and outside diameters, fitting's radius or borders, shoulders and bar's end with only a single tool. **The carbide roller burnishing tools have been studied for being used on CNC lathes**. The surfaces to be burnish are prepared of turning with a roughness of 2-2,5  $\mu$ m. The tool, put in the due working position, has used with a speed same of the turning's speed, obtaining a roughness of 0,13-0,20  $\mu$ m. This replace the need of a pickup operation.


**Long life of the tool:** The DREX®-TOOLS roller burnishing tools have a long life carbide roll, mounted on a bearing for high results that turns on a hardened axle. The carbide roll is spring loaded in the two axial directions for having the right pressure during the burnishing operation. The carbide roll can be reconditioned for more times.

The below pictures show a part on which the inside stepped burnishing has been carried out picture 1, the fitting's radius picture 2, the front flat picture 3 and the outside diameter with the shoulder picture 4.


All the surfaces can be burnished with a CNC program similar to the turning program.

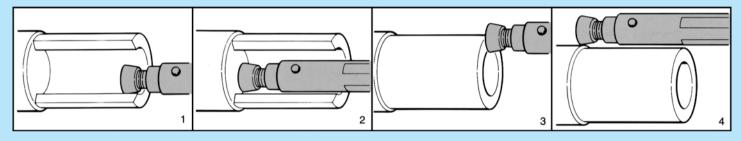

**D30-30-0** It is the right tool for small size parts; with its roll diameter 30,2 and an overall length of 241 mm it is possible to burnish holes beginning from a diameter 35 mm and for a depth of 75 mm.



**D30-45L-0** It is the tool to prefer for big and depth inside diameters. With the roll diameter 44,45 mm and an overall length of 457 mm it is the tool suitable for big turning centres. It is possible to burnish holes from diameter 50 mm and more.

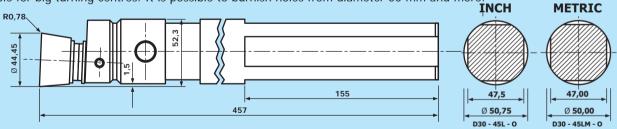

D30-45-0 This tool with a roll diameter 44,45 mm and a length of 305 mm has been studied for carrying out the burnishing on medium size holes. It is possible to burnish holes from diameter 50 mm and more.

INCH

METRIC

